


Monocrystalline Solar Module

VS-M60 (125)



Modules designed for residential and utility applications, rooftop or ground mount.

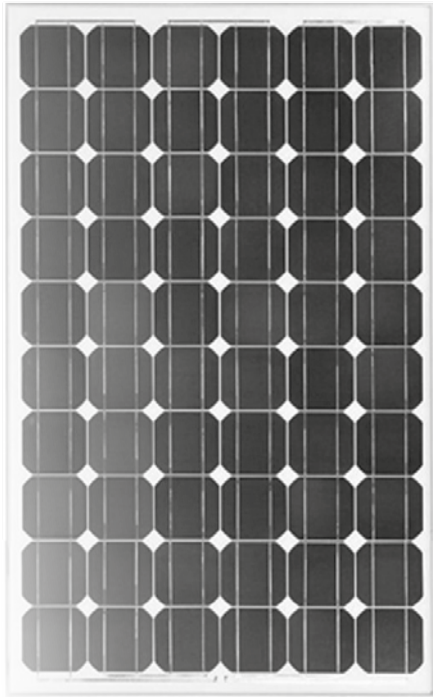

The latest module manufacturing technology, high power output and highest conversion efficiency.



Anti-reflective and anti soiling surface reduces power loss from dirt and dust.



Original photovoltaic Connector MC4 whigh reliability.



The module can withstand snow loads up to 5400Pa and wind loads up to 2400Pa.



High performance in low light conditions Cloudy days, sunrises and sunsets.




IP67 junction box for long-term weather endurance.

3Wp+

Positive power tolerance up to 3W.

Linear Performance Warranty

10 year product warranty | 25 year line power warranty

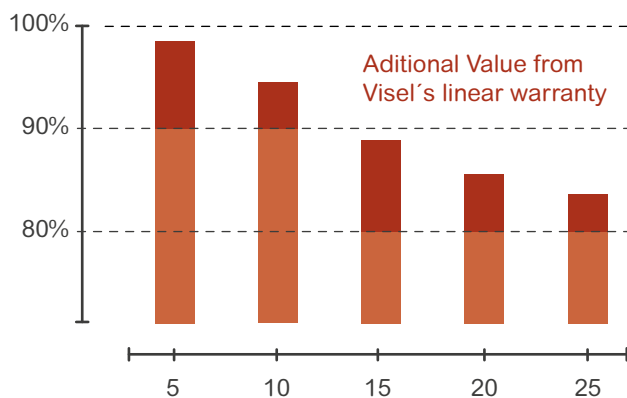

Visel

Industry Standar

* Warning : read the manual for installation and use before handing or installing VISEL modules.

* The values, characteristics and parameters listed in this document are subject to change without notice.

Product Certificates



Monocrystalline Solar Module


VS-M60 (125)

Electrical Characteristics

Type	VS195-M60	VS200-M60	VS205-M60	VS210-M60	VS215-M60	VS220-M60
Max-Power Pm (W)	195	200	205	210	215	220
Power Tolerance (W)	0/+3%	0/+3%	0/+3%	0/+3%	0/+3%	0/+3%
Max-Power Voltage Vm (V)	36.68	36.84	37.14	37.45	37.72	38
Max-Power Current Im (A)	5.32	5.43	5.52	5.61	5.70	5.79
Short - Circuit Current Isc (A)	5.62	5.77	5.86	5.95	6.04	6.13
Open Circuit Voltage Voc (V)	45.29	45.32	45.37	45.61	45.82	46.11
Max-System Voltage (VDC)	1000	1000	1000	1000	1000	1000
Cell Efficiency (%)	16.05	16.60	17.15	17.52	18.00	18.40
Module Efficiency (%)	15.27	15.67	16.06	16.45	16.84	17.23
Max. Series Fuse (A)	10	10	10	10	10	10
PM Temperature Coefficients (%/°C)	-0.514	-0.514	-0.514	-0.514	-0.514	-0.514
Isc Temperature Coefficients (%/°C)	+0.0814	+0.0814	+0.0814	+0.0814	+0.0814	+0.0814
Voc Temperature Coefficients (%/°C)	-0.391	-0.391	-0.391	-0.391	-0.391	-0.391
NOCT Nominal Operating Cell Temperature	45±2°C	45±2°C	45±2°C	45±2°C	45±2°C	45±2°C


All specified parameters at STC 25 °C ambient, 1000 W/m² irradiance and AM 1.5

Mechanical Specifications

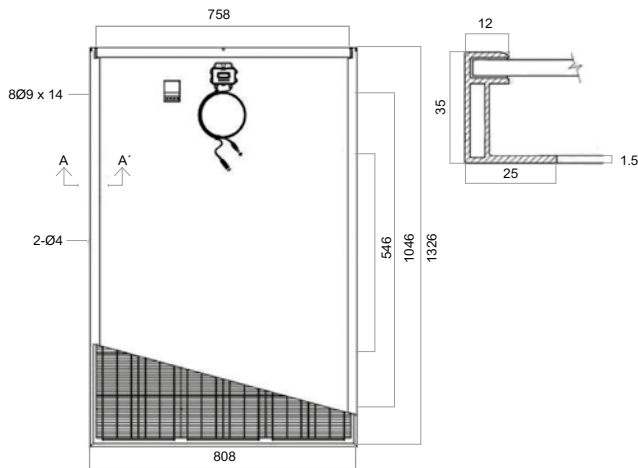


I-V Curve

Temperature dependence of Isc, Voc and Pmax

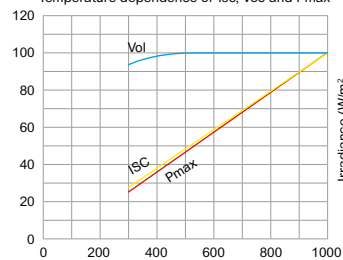

Irradiance dependence of Isc, Voc and Pmax

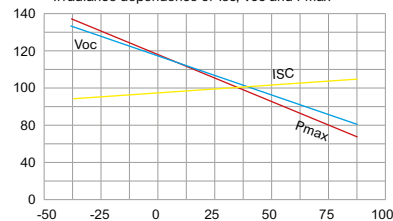

I-V Curves at different Irradiances (AM1.5 25°C)

Specifications included in this datasheet are subject to change I-V Curves at without prior notice

Mechanical Characteristics

Cable Type	4mm ² , TUV certified, 0.9m length, MC4
Junction Box	IP67, 1000VDC, TUV certify 3 by-pass diodes
Frame	Clear anodized aluminum alloy silver color
Solar Cell	60 units (6x10) in series, 125x125mm mono crystalline
Dimension (mm)	1326x808x35
Weight (Kg)	13.6
Glass	Low-iron tempered glass, thickness 3.2mm

Absolute Ratings

Dielectric Insulation Voltage	3000V
Operating Temperature (°C)	-40~+85
Storage Temperature (°C)	-40~+85

Load Rating

Maximum snow load	5400Pa
Maximum wind load	2400Pa
Hail impact test	Iceball diameter 25mm at 23m/s